


Bausatz: Einschubkontakt SASIL construction: plug-in contact SASIL

- 10mm Sammelschienen/10mm busbar system

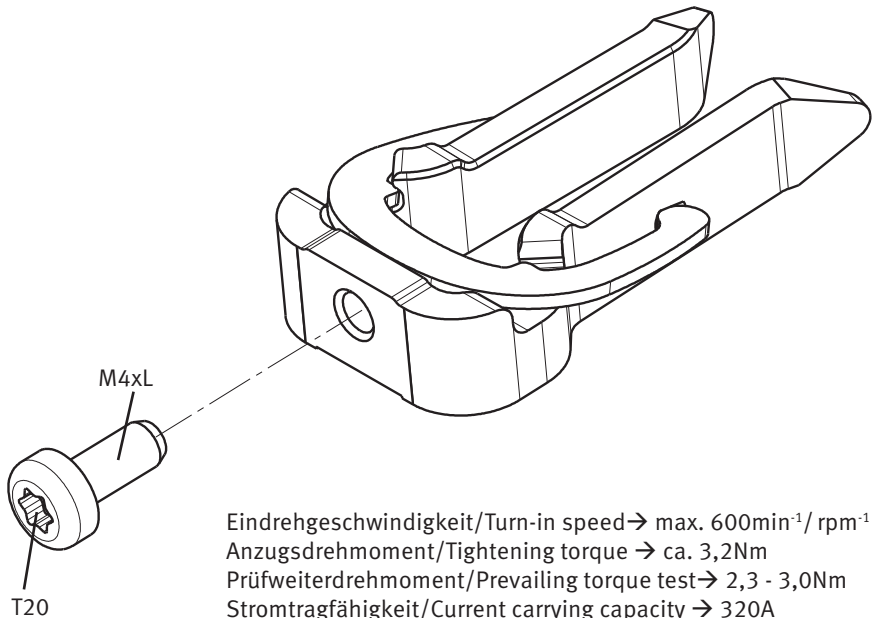

Eindrehgeschwindigkeit/Turn-in speed → max. 600min⁻¹/ rpm⁻¹
 Anzugsdrehmoment/Tightening torque → ca. 3,2Nm
 Prüfweiterdrehmoment/Prevailing torque test → 2,3 - 3,0Nm
 Stromtragfähigkeit/Current carrying capacity → 320A

Anschlusschienenstärke/ Connecting rail thickness	Schraubenlänge L/ Screw length
3mm	8mm
4mm	9,5mm
5mm	9,5mm
6mm	12mm