

Kabelverteilerschränke

Cable distribution cabinets

Mehrspartenschränke

Cabinets for sectors

Für spezielle Anwendungsfälle bietet JEAN MÜLLER optimale Lösungen:

Mehrspartenschränke

bündeln unterschiedliche Gewerke in einem Schrank und sind eine kostengünstige und platzsparende Alternative zu Anschlussräumen im Haus. Das Gehäuse (ohne Sockel) LABEO KVSL-31 in 320 mm tief und 1100 mm hoch mit zwei getrennt schließenden Türen (jeweils mit eigener Schließung) ist links mit einem separaten Stromteil, mit Hausanschlusskasten 1x3xNH00, Zähler- und Verteilerkomponenten in Isolierstoffgehäusen und 4-Leiter Sammelschienenensystem im unteren Anschlussraum vorbereitet. Abgangsseitig sind Reihenklemmen installiert. In der rechten Seite ist eine Montageplatte mit Setzmutter für die Aufnahme des Gas- und Wasserzählers und optionaler Rohrbegleitheizung eingebaut.

Für detaillierte Informationen siehe Kapitel Zähleranschluss-/Wandlermessschränke sowie Katalog Stromverteilungskomponenten für NH-Systeme Abschnitt NH-Sicherungsleisten/NH-Sicherungslastschaltleisten.

Abweichende Varianten auf Anfrage.

Bitte Rücksprache mit zuständigem Verteilnetzbetreiber halten!

JEAN MÜLLER offers customized solutions for special applications.

Cabinets for sectors

combine different crafts in one cabinet as a reasonable and space-saving alternative to common in-house compartments. The cabinet (base is not included in delivery) type LABEO KVSL-31 in 320 mm depth and 1100 mm height two separated functional units, each one with separate door (with separate locking). The left side contains connection for power supply and metering and is fitted with service entrance box 1x3xNH00, metering and distribution components in insulating enclosures. Terminal blocks are mounted for outgoing cables. A mounting plate on the right side offers space for installing gas- or water meters and optional trace heating.

For detailed information see chapter Metering cabinets/Transducer cabinets and catalogue Current distribution components for NH systems chapter LV HRC strip-fuseways/LV HRC strip-type fuse-switch-disconnectors.

Differing variants on demand.

Before installation please contact your local energy supplier!

Mehrspartenschränke
Cabinets for sectors

Beschreibung Description	Typ Type	Artikel-Nr. Article-No.
– Kabelverteilerschrank Typ LABEO Größe 2 mit getrennten Funktionsräumen 320 mm tief, 1100 mm hoch, Einfach- und Doppelschließung – Montageplatte (985x515) links bestückt mit Hausanschlusskasten Gr. 1 (inkl. NH2 Unterteilen) – Montageplatte (985x515) rechts zur freien Bestückung, separiert durch eine Trennwand – Normsockel Typ FP2-10/KS/2BV – <i>Cable distribution cabinet type LABEO size 2 with separated function rooms 320 mm depth, 1100 mm height, single and double locking</i> – <i>Mounting plate (985x515) left with mounted service entrance box size 1 (incl. NH2 fuse-bases)</i> – <i>Mounting plate (985x515) right for free assembly separated by a wall</i> – <i>Standard base type FP2-10/KS/2BV</i>	QU-KVSLA2-31/SV/SVD/KH1/ABS/MPL-GWV/FP2	S4216002
– Kabelverteilerschrank Typ LABEO Größe 2 mit getrennten Funktionsräumen 320 mm tief, 1100 mm hoch, Einfach- und Doppelschließung – Montageplatte (985x515) links bestückt mit DIN Hausanschlusskasten Gr. 00 (H5980702), 4-poligem Sammelschienensystem mit SHA/SHU 63A 3-polig 25 KA, Zählerplatte mit EHZ Adapter und BKE-Datenschnittstelle, SI-Automat B 10A 1-polig 25 KA, Hauptschalter 3 S 63A 400VAC sperrbar und SI-Automat B 10A 1-polig 25 KA für die Versorgung des MUC-Raum – Montageplatte (985x515) rechts zur freien Bestückung, separiert durch eine Trennwand – <i>Cable distribution cabinet type LABEO size 2 with seperated function rooms 320mm depth, 1100 mm height, two double lockings</i> – <i>Mounting plate (985x515) left mounted with DIN service entrance box size 00 (H5980702), 4-pole busbar system with SHA/SHU 63A 3 pol 25 KA, Counting plate with EHZ adapter and BKE-data interface, SI-circuit-breaker B 10A 1- pole 25 KA, circuit breaker 3 S 63A 400VAC lockable and SI-circuit-breaker B 10A 1-pole 25 KA for the MUC supply</i> – <i>Mounting plate (985x515) right for free assembly separated by a wall</i>	QU-KVSLA2-31/SVD/SVD/MPL/HAK/SPS(HSA63A/ZP-EHZ/HLAK25)/ABS/MPL/FP2	S4216000
– Kabelverteilerschrank Typ LABEO Größe 3 mit getrennten Funktionsräumen 320 mm tief, 1100 mm hoch, Doppel- und Einfachschißung – Montageplatte (985x515) links bestückt mit DIN Hausanschlusskasten Gr. 00 (H5980702), 5-poligem Sammelschienensystem mit SHA/SHU 63A 3-polig 25KA, Zählerplatte, 5-polige Abgangsklemmen 35 mm², SI-Automat B 10A 1-polig 25 KA – Montageplatte (985x515) rechts zur freien Bestückung inklusive SCHUKO-Steckdose, separiert durch eine Trennwand – <i>Cable distribution cabinets type LABEO size 3 with separated function rooms 320 mm depth, 1100 mm height, double and single locking</i> – <i>Mounting plate (985x515) left mounted with DIN service entrance box size 00 (H5980702), 5-pole busbar system with SHA/SHU 63A 3-pole 25 KA, Counting plate, 5-pole outgoing clamps 35 mm², SI-circuit-breaker B 10A 1-pole 25 KA – Mounting plate (985x515) right for free assembly including socket, separated by a wall</i>	QU-KVSLA3-31/SVD/SV/MPL/HAK/SPS(HSA63A/ZP/HLAK35)/ISO/ABS/MPL/ST	S4316000

Hausanschluss-
technik
Consumer supply
technology

Kabelverteiler-
schränke
Cable distribution
cabinets


Anhang
Appendix

Kabelverteilerschränke

Cable distribution cabinets


Maßzeichnungen/*Dimensions*

Typ/Type	Artikel-Nr./Article-No.	Seite/ Page
QUKVSLA231/SV/SVD/KH1/ABS/MPLGWV/FP2	S4216002	S-123

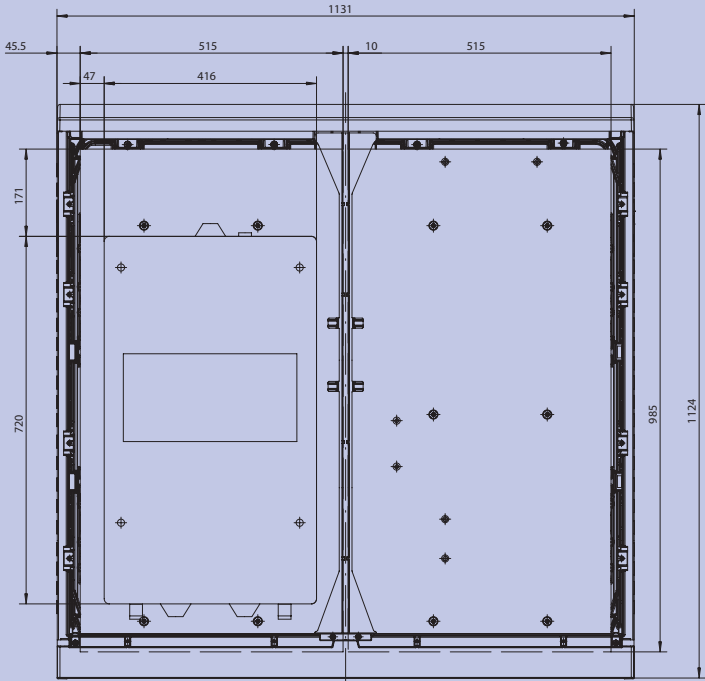


Technical drawing of cable distribution cabinet S4216002. The drawing shows the front and side views of the cabinet. The front view dimensions are: total width 1131, top rail offset 45.5, top rail width 47, top rail to centerline distance 515, centerline to centerline distance 416, centerline to right edge distance 515, and total height 1124. The side view dimensions are: total depth 985, top rail offset 45.5, top rail width 47, top rail to centerline distance 515, centerline to centerline distance 416, centerline to right edge distance 515, and total height 1124. The cabinet has a central door with a handle and a lock mechanism.

Typ/Type	Artikel-Nr./Article-No.	Seite/ Page
QUKVSLA231/SVD/SVD/MPL/HAK/SPS(HSA63A/ZPEHZ/HLAK25)/ABS/MPL/FP2	S4216000	S-123

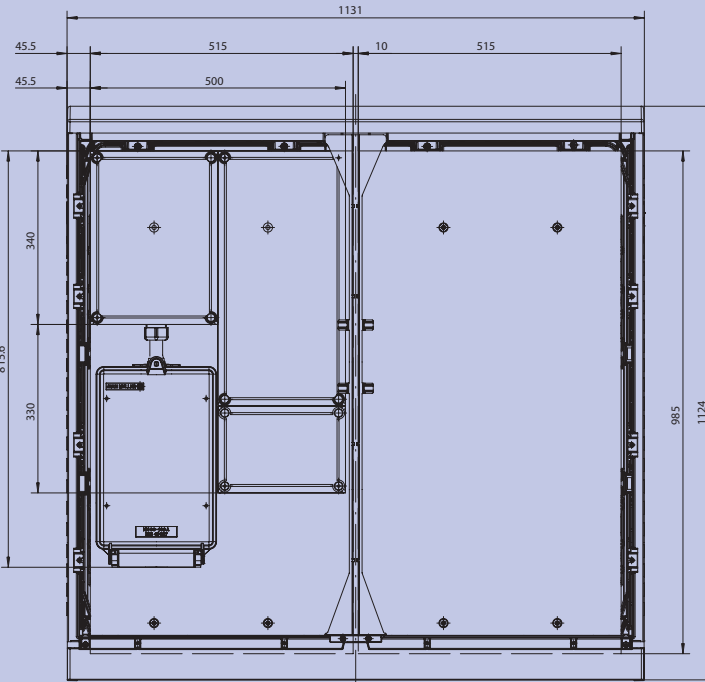

Technical drawing of cable distribution cabinet S4216000. The drawing shows the front and side views of the cabinet. The front view dimensions are: total width 1131, top rail offset 45.5, top rail width 47, top rail to centerline distance 515, centerline to centerline distance 500, centerline to right edge distance 515, and total height 1124. The side view dimensions are: total depth 985, top rail offset 45.5, top rail width 47, top rail to centerline distance 515, centerline to centerline distance 500, centerline to right edge distance 515, and total height 1124. The cabinet has a central door with a handle and a lock mechanism.

Typ/Type	Artikel-Nr./Article-No.	Seite/ Page
QUKVSLA331/SVD/SV/MPL/HAK/SPS(HSA63A/ZP/HLAK35)/ISO/ABS/MPL/ST	S4316000	S-123

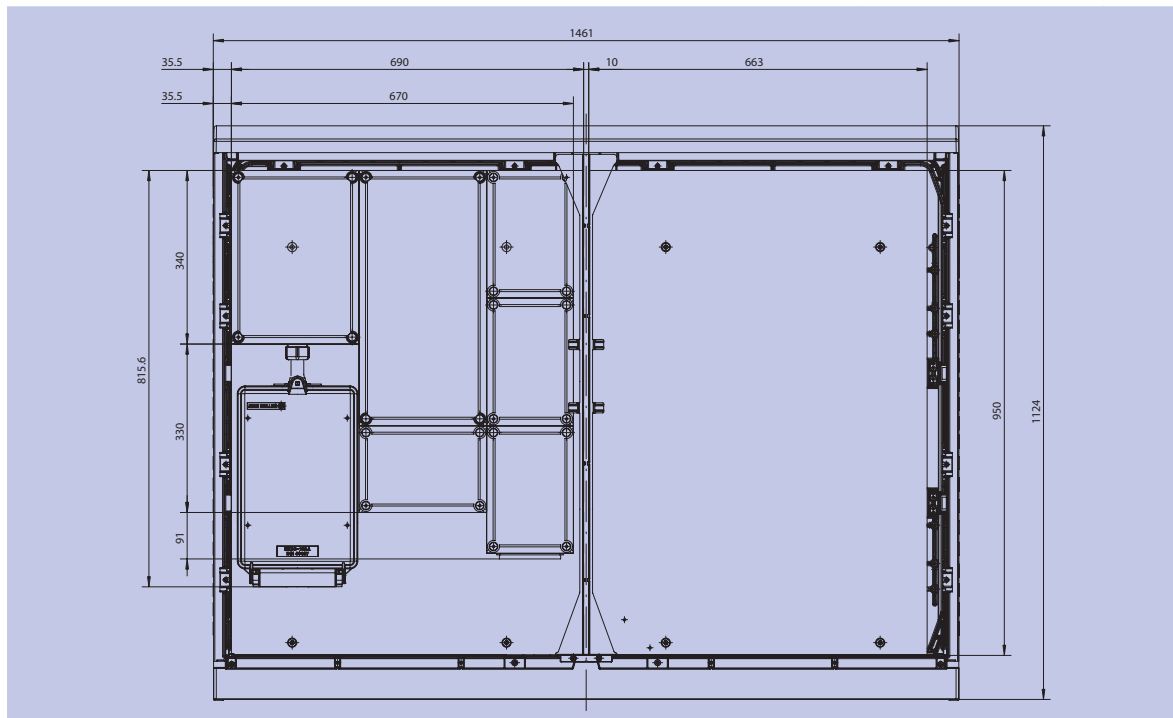

Hausanschluss-
technik
*Consumer supply
technology*

Kabelverteiler-
schränke
*Cable distribution
cabinets*

Anhang
Appendix